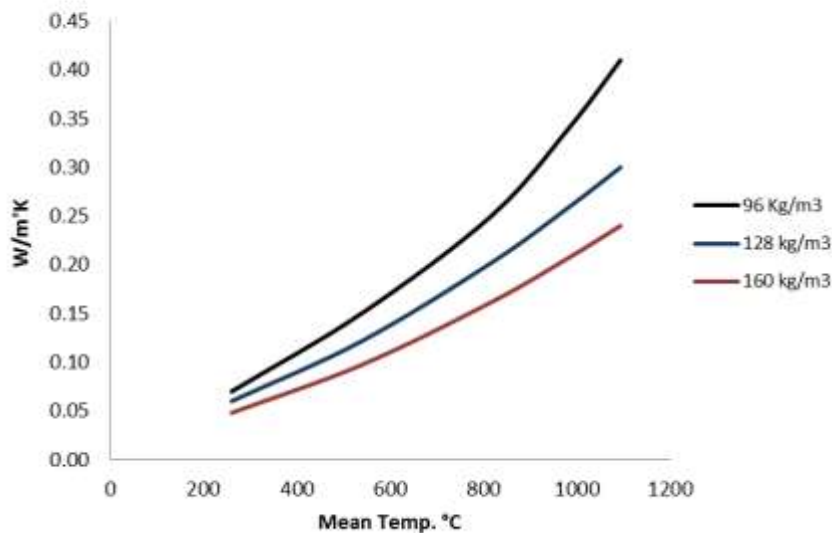


| PRODUCT | HPS |
|---|-------------------------------|
| Color | White |
| Density kg/m ³ (lb/ft ³) | 64, 96, 128, 160 (4, 6, 8,10) |
| Thickness mm (in) | 12.5 - 50 (½ - 2) |
| Continuous Use Limit | 1204 °C (2200 °F) |
| Maximum Use Limit | 1315 °C (2400 °F) |
| Melting Point | 1760°C (3200°F) |
| CHEMICAL ANALYSIS, % | |
| Al ₂ O ₃ | 44 – 50 |
| SiO ₂ | 50 – 56 |
| ZrO ₂ | --- |
| Trace Elements | < 1% |
| LINEAR SHRINKAGE, % | |
| 24 Hr @ 1000°C (1832 °F) | --- |
| 24 Hr @ 1100°C (2012 °F) | 1.8 |
| 24 Hr @ 1300°C (2372 °F) | --- |

RCF Blanket - Thermal Conductivity


The values given herein are typical average values obtained in accordance with accepted tests methods and are subject to normal manufacturing variations. The information contained in this publication is for illustrative purposes and is subject to change without notice. And does not intends to create any contractual obligation.